


Plastic Fibre Cable PROFIBUS

POF/PA


HELUCOM®

I-V4Y(ZN)Y



Cable structure

Fibre type: POF 980/1000
Fibre cladding: PA

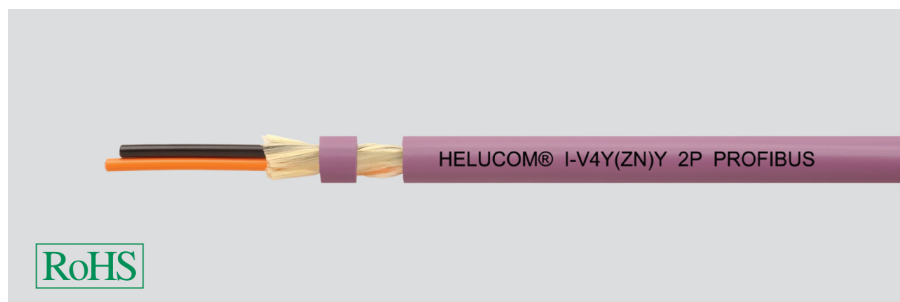

Optical characteristic

Refractive index core: 1,492
Refractive index cladding: 1,419
Numerical aperture: 0,5
Attenuation see table

Temperature range

Laying, min.: -10°C
Laying, max.: +50°C
Operating, min.: -30°C
Operating, max.: +70°C

Designation	Outer sheath material	Sheath colour	Outer Ø app. mm	Max. tensile force N	Min. stat. bending radius mm	Fibre attenuation	Oil-resistant	Acc. to DESINA®	Weight kg / km	Part no.
I-V4Y(ZN)Y 2P980/1000µm, fixed installation PVC		Violet	7,8	100	100,0	160A1	yes	yes	59,0	801280

Dimensions and specifications may be changed without prior notice.

Application

Signal lines as plastic optical fibre. The use of these transmission systems significantly reduces the number of different cables in a planned bus installation in machine tools operations. Furthermore, possible EMC problems are prevented by the metal-free construction. The main application of these cables are in machine construction and automobile industry. The type on this page is especially constructed for communication within PROFIBUS systems.