


Fibre Optic Breakout Cable PROFIBUS + PROInet

fixed installation

HELUCOM®
AT-W(ZN)H(ZN)H

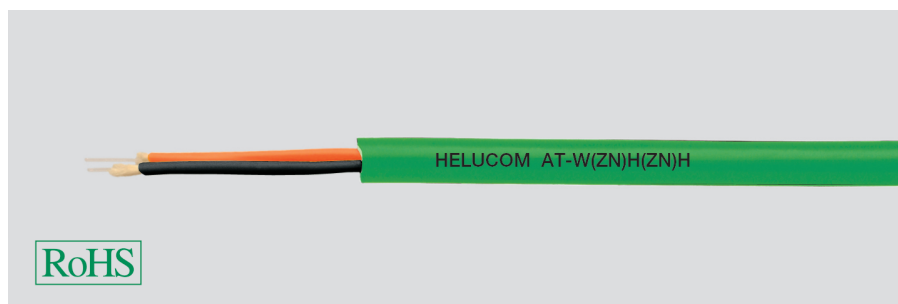

Cable structure

Core type: Buffered-fibre
GRP support element
Strain relief elements: Aramide
Outer sheath material: FRNC
Outer sheath colour: Green similar to RAL 6018

Temperature range

Laying, min.: -5°C
Laying, max.: +50°C
Operating, min.: -40°C
Operating, max.: +85°C

Other data

Corrosiveness acc. to EN50267-2-3
Halogen-free acc. to 60754-2
Flame-resistance acc. to IEC 60332-1 and IEC 60332-3
Smoke density acc. to IEC 61034
Applicable UL standards: OFN UL1651
Applicable CSA standards: FT1
UV-resistant
Resistant to hammer impact acc. to IEC 60794-1-2-E4
Oil-resistant

Designation	Number of fibres	Fibre type	Fibre category	Outer Ø app. mm	Max. tensile force N	Min. stat. bending radius mm	Max. transverse pressure N / cm	Weight kg / km	Part no.
AT-W(ZN)H(ZN)H	2	Multimode G50/125	OM2	9,2	1200	90	500	80	805689
AT-W(ZN)H(ZN)H	2	Multimode G50/125	OM4	9,2	1200	90	500	80	805691

Dimensions and specifications may be changed without prior notice.

Application

The HELUCOM® range is set apart by its extreme rugged rodent protected design. It is used wherever demanding environmental conditions while fixed installations occur. The tight buffer structure enables the cable to be pre-assembled on site with ease. Applications are for example Installation in backbones (805691) or in trays within industry areas (805689).