


BW fastening elbow

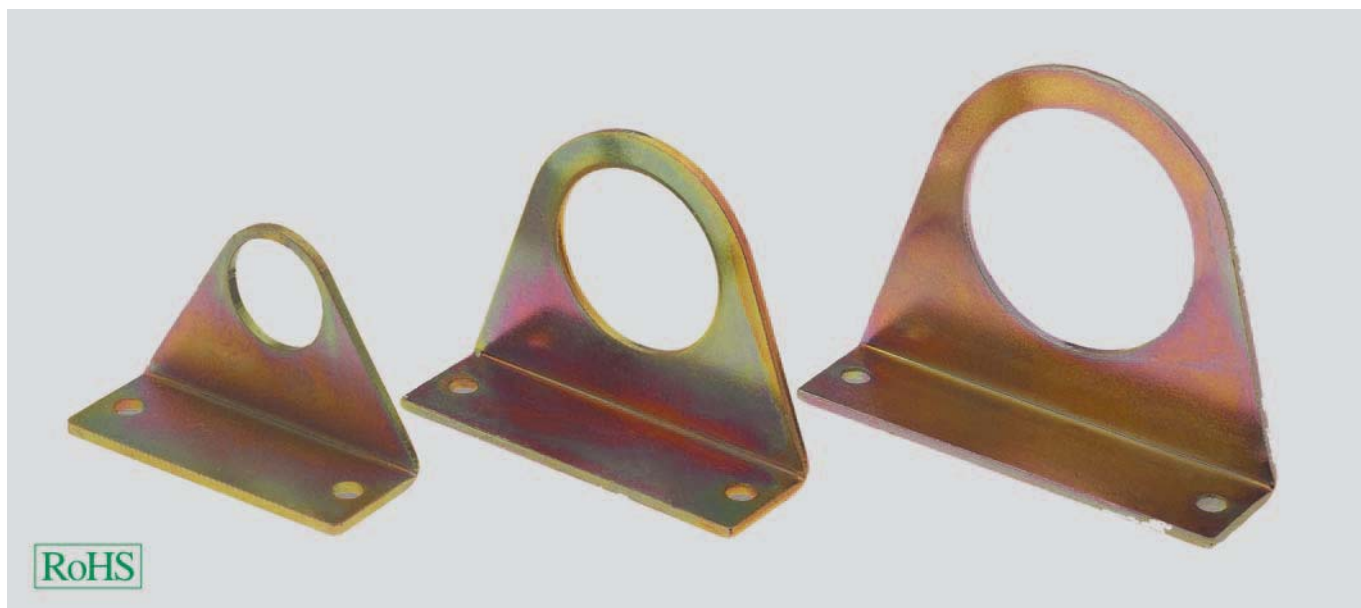


BW

Mounting bracket with penetration and two fastening bores.

For mounting in a door or door elements, as earthing connection and also to equalise potentials in metallic glands.

Material

Steel, chromated yellow



Application

- Plant and machine construction
- Robot construction
- Automation technology
- Vehicle construction and shipbuilding
- Rail technology
- Installation technology
- Control cabinet construction

Dimensions

- D Inner diameter
d Boring diameter
b Distance boring (center/center)

for metric thread

Part no.	Size	Inner Ø mm	Boring mm	Boring spacing mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
93720	M16 x 1,5	17,0	4,5	40	25	o. r.	o. r.	o. r.
93721	M20 x 1,5	21,0	4,5	40	25	o. r.	o. r.	o. r.
93722	M25 x 1,5	26,0	4,5	50	25	o. r.	o. r.	o. r.
93723	M32 x 1,5	33,0	4,5	60	25	o. r.	o. r.	o. r.
93724	M40 x 1,5	41,0	4,5	70	25	o. r.	o. r.	o. r.
93725	M50 x 1,5	51,0	4,5	80	25	o. r.	o. r.	o. r.

for PG thread

Part no.	Size	Inner Ø mm	Boring mm	Boring spacing mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
93715	16	23,0	4,5	40	25	o. r.	o. r.	o. r.
93716	21	29,0	4,5	50	25	o. r.	o. r.	o. r.
93717	29	37,5	4,5	60	25	o. r.	o. r.	o. r.
93718	36	47,5	4,5	70	25	o. r.	o. r.	o. r.
93719	48	60,0	4,5	80	25	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request