

HSK-MS-B cable gland

anti-kink



HSK-MS-B

With anti-bend spirals

- Easy to assemble
- Completely water-tight
- Optimum strain relief
- Large clamping areas

Application

- Plant and machine construction
- Robot construction
- Automation technology
- Vehicle construction and shipbuilding
- Rail technology
- Installation technology
- Control cabinet construction

Material

Brass, nickel plated

Clamp: Polyamide PA 6

Moulded seal: NBR

O-ring: NBR


Kinking protection spring: Stainless steel (1.4310)

Technical data

Protection class: IP 68 - 10 bar / IP 69K

Temperature range: -40°C up to +100°C

Test standard: EN50262

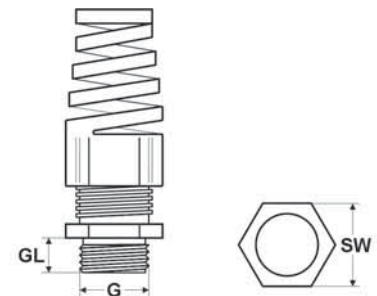

Dimensions

G Thread size
GL Thread length
SW Spanner size

metric thread

Part no.	Size Metr.	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
92917	M12 x 1,5	3,0 - 6,5	6,5	14	50	o. r.	o. r.	o. r.
92918	M16 x 1,5	4,0 - 8,0	6,0	19	50	o. r.	o. r.	o. r.
92919	M16 x 1,5	5,0 - 10,0	6,0	20	50	o. r.	o. r.	o. r.
92920	M20 x 1,5	6,0 - 12,0	6,0	22	50	o. r.	o. r.	o. r.
92921	M20 x 1,5	10,0 - 14,0	6,0	24	25	o. r.	o. r.	o. r.
92922	M25 x 1,5	13,0 - 18,0	7,0	30	20	o. r.	o. r.	o. r.

PG thread

Part no.	Size PG	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
92911	7	3,0 - 6,5	5,0	14	50	o. r.	o. r.	o. r.
92912	9	4,0 - 8,0	6,0	17	50	o. r.	o. r.	o. r.
92913	11	5,0 - 10,0	6,0	20	50	o. r.	o. r.	o. r.
92914	13,5	6,0 - 12,0	6,5	22	50	o. r.	o. r.	o. r.
92915	16	10,0 - 14,0	6,5	24	25	o. r.	o. r.	o. r.
92916	21	13,0 - 18,0	7,0	30	20	o. r.	o. r.	o. r.

NPT thread

Part no.	Size NPT	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
92923	3/8"	4,0 - 8,0	15,0	17 / 19	50	o. r.	o. r.	o. r.
92924	1/2"	6,0 - 12,0	13,0	22 / 24	50	o. r.	o. r.	o. r.
92925	3/4"	13,0 - 18,0	13,0	33	20	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request