

HSK-MS-PVDF cable gland

brass and polyvinylidene fluoride



HSK-MS-PVDF

Polyvinylidene fluoride for use in the chemical industry, at high temperatures, under long-term UV exposure.
The cable gland to meet stringent requirements in technology

- Easy to assemble
- Completely water-tight
- Optimum strain relief
- Large clamping areas

Material


Brass, nickel plated
Clamp: PVDF
Moulded seal: FKM
O-ring: FKM

Technical data

Protection class: IP 68 - 10 bar / IP 69K

Temperature range: -35°C up to +150°C

Test standard: EN50262

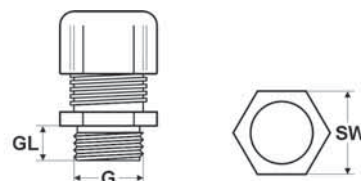

Dimensions

G Thread size
GL Thread length
SW Spanner size

metric thread

Part no.	Size Metr.	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
97571	M12 x 1,5	3,0 - 6,5	6,5	14	50	o. r.	o. r.	o. r.
97572	M16 x 1,5	4,0 - 8,0	6,0	17 / 19	50	o. r.	o. r.	o. r.
905084	M16 x 1,5	5,0 - 10,0	6,0	20	50	o. r.	o. r.	o. r.
97573	M20 x 1,5	10,0 - 14,0	6,0	24	50	o. r.	o. r.	o. r.
97574	M25 x 1,5	13,0 - 18,0	7,0	30	25	o. r.	o. r.	o. r.
97575	M32 x 1,5	18,0 - 25,0	8,0	40	25	o. r.	o. r.	o. r.
97576	M40 x 1,5	22,0 - 32,0	8,0	50	10	o. r.	o. r.	o. r.

PG thread

Part no.	Size PG	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
97565	7	3,0 - 6,5	5,0	14	50	o. r.	o. r.	o. r.
97500	9	4,0 - 8,0	6,0	17	50	o. r.	o. r.	o. r.
97445	11	5,0 - 10,0	6,0	20	50	o. r.	o. r.	o. r.
97446	13,5	6,0 - 12,0	6,5	22	50	o. r.	o. r.	o. r.
97447	16	10,0 - 14,0	6,5	24	50	o. r.	o. r.	o. r.
97566	21	13,0 - 18,0	7,0	30	25	o. r.	o. r.	o. r.
97567	29	18,0 - 25,0	8,0	40	25	o. r.	o. r.	o. r.
97568	36	22,0 - 32,0	8,0	50	10	o. r.	o. r.	o. r.
97569	42	32,0 - 38,0	9,0	57	5	o. r.	o. r.	o. r.
97570	48	37,0 - 44,0	10,0	64	5	o. r.	o. r.	o. r.

NPT thread

Part no.	Size NPT	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
97663	3/8"	4,0 - 8,0	15,0	17 / 19	25	o. r.	o. r.	o. r.
97664	1/2"	6,0 - 12,0	13,0	22 / 24	50	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request