


HSK-MZ-E EMC - cable gland

with strain relief

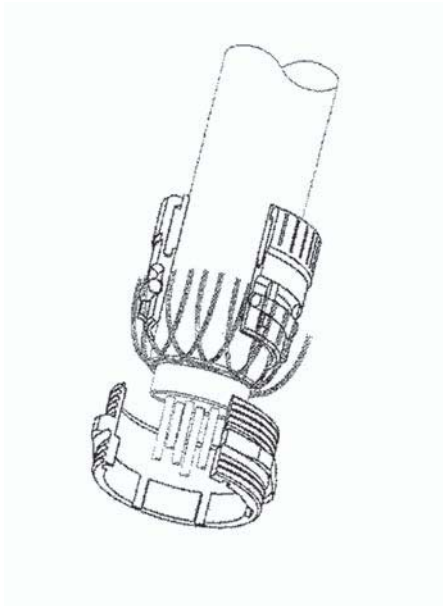

RoHS

HSK-MZ-E

The EMC cable gland with double bracket strain relief

- Easy to assemble
- Completely water-tight
- Optimum strain relief
- Large clamping areas

Application

- Plant and machine construction
- Automation technology
- Vehicle construction and shipbuilding
- Installation technology

Material


Brass, nickel plated
Clamp: Polyamide
Moulded seal: NBR
O-ring: NBR

Technical data

Protection class: IP 68 - 10 bar / IP 69K

Temperature range: -40°C up to +100°C

Test standard: EN50262

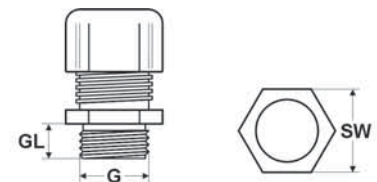

Dimensions

G Thread size
GL Thread length
SW Spanner size

metric thread

Part no.	Size Metr.	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
98070	M12 x 1,5	3,0 - 6,5	6,5	14	50	o. r.	o. r.	o. r.
98071	M16 x 1,5	6,0 - 10,0	6,0	20	50	o. r.	o. r.	o. r.
98072	M20 x 1,5	10,0 - 14,0	6,0	24	50	o. r.	o. r.	o. r.
98073	M25 x 1,5	13,0 - 18,0	7,0	30	25	o. r.	o. r.	o. r.
98074	M32 x 1,5	18,0 - 25,0	8,0	40	25	o. r.	o. r.	o. r.
98075	M40 x 1,5	22,0 - 32,0	8,0	50	10	o. r.	o. r.	o. r.
90162	M50 x 1,5	32,0 - 38,0	9,0	57	5	o. r.	o. r.	o. r.
90163	M63 x 1,5	37,0 - 44,0	10,0	64 / 68	5	o. r.	o. r.	o. r.

PG thread

Part no.	Size PG	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
98061	7	3,0 - 6,5	5,0	14	50	o. r.	o. r.	o. r.
98062	9	4,0 - 8,0	6,0	17	50	o. r.	o. r.	o. r.
98063	11	6,0 - 10,0	6,0	20	50	o. r.	o. r.	o. r.
98064	13,5	6,0 - 12,0	6,5	22	50	o. r.	o. r.	o. r.
98065	16	10,0 - 14,0	6,5	24	50	o. r.	o. r.	o. r.
98201	21	13,0 - 18,0	7,0	30	25	o. r.	o. r.	o. r.
98066	29	18,0 - 25,0	8,0	40	25	o. r.	o. r.	o. r.
98067	36	22,0 - 32,0	8,0	50	10	o. r.	o. r.	o. r.
98068	42	32,0 - 38,0	9,0	57	5	o. r.	o. r.	o. r.
98069	48	37,0 - 44,0	10,0	64	5	o. r.	o. r.	o. r.

NPT thread

Part no.	Size NPT	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
92908	3/8"	4,0 - 8,0	15,0	17 / 19	50	o. r.	o. r.	o. r.
92909	1/2"	6,0 - 12,0	13,0	22 / 24	50	o. r.	o. r.	o. r.
92910	3/4"	13,0 - 18,0	13,0	30	25	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request