



HSK-WI

Folding profile gland for simple cable insertion.
The profile can be re-opened at any time.

Application

- Plant and machine construction
- Robot construction
- Automation technology
- Vehicle construction and shipbuilding
- Rail technology
- Installation technology
- Control cabinet construction

Material

Polyamide
Moulded seal: NBR
O-ring: NBR

- halogen-free
- phosphor-free
- silicone-free
- cadmium-free

Note


Elbow gland with NPT thread without O-Ring

Technical data

Protection class: IP 68

Temperature range: -40°C up to +100°C

Test standard: EN50262

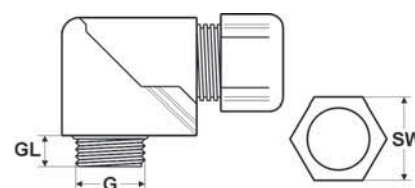

Dimensions

G Thread size
GL Thread length
SW Spanner size

metric thread

Part no. light grey RAL 7035	Part no. black RAL 9005	Size Metr.	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
							up to 100	101 - 500	501 - 1000
91284	91840	M16 x 1,5	4,0 - 8,0	8,0	19	25	o. r.	o. r.	o. r.
91285	91841	M20 x 1,5	6,0 - 12,0	9,0	24	25	o. r.	o. r.	o. r.
91286	91842	M25 x 1,5	13,0 - 18,0	11,0	33	10	o. r.	o. r.	o. r.
91287	91843	M32 x 1,5	18,0 - 25,0	11,0	42	5	o. r.	o. r.	o. r.

PG thread

Part no. light grey RAL 7035	Part no. black RAL 9005	Size PG	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
							up to 100	101 - 500	501 - 1000
96981	96581	9	4,0 - 8,0	8,0	19	25	o. r.	o. r.	o. r.
96982	96103	11	5,0 - 10,0	8,0	22	25	o. r.	o. r.	o. r.
96983	96582	13,5	6,0 - 12,0	9,0	24	25	o. r.	o. r.	o. r.
96984	96583	16	10,0 - 14,0	10,0	27	25	o. r.	o. r.	o. r.
96985	96584	21	13,0 - 18,0	11,0	33	10	o. r.	o. r.	o. r.
96986	96406	29	18,0 - 25,0	11,0	42	5	o. r.	o. r.	o. r.

NPT thread

Part no. light grey RAL 7035	Part no. black RAL 9005	Size NPT	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
							up to 100	101 - 500	501 - 1000
92690	92700	3/8"	4,0 - 8,0	15,0	19	25	o. r.	o. r.	o. r.
92691	92701	1/2"	6,0 - 12,0	13,0	24	25	o. r.	o. r.	o. r.
92692	92702	1/2"	10,0 - 14,0	13,0	27	25	o. r.	o. r.	o. r.
92693	92703	3/4"	13,0 - 18,0	13,0	33	20	o. r.	o. r.	o. r.
92694	92704	1"	18,0 - 25,0	19,0	42	5	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request