


Plastic-fibre cable industry

POF/PE

HELUCOM®

I-V2Y, I-V2Y(ZN)11Y

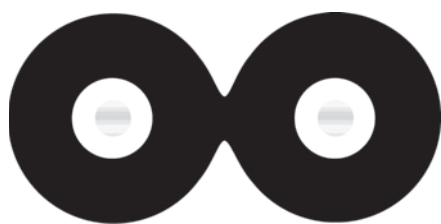

Cable structure

Fibre type: POF 980/1000
Fibre cladding: PE

Optical characteristic

Refractive index core: 1,492
Refractive index cladding: 1,419
Numerical aperture: 0,5
Attenuation see table

Temperature range

Laying, min.: -20°C
Laying, max.: +80°C
Operating, min.: -20°C
Operating, max.: +80°C

Designation	Outer sheath material	Jacket colour	Outer Ø approx. mm	Max. tensile force N	Min. stat. bending radius mm	Fibre attenuation	Oil-resistant	Acc. to DESINA	Weight kg / km	Part no.
I-V2Y 1P 980/1000	PE	Black	2,2	70	25,0	160A1	no	no	4,0	80532
I-V2Y 2P 980/1000	PE	Black	2,2 x 4,4	140	25,0	160A1	no	no	8,0	80388
I-V2Y(ZN)11Y 1P 980/1000	PUR	Violet	5,8	400	30,0	230A1	yes	yes	30,0	81611
I-V2Y(ZN)11Y 2P 980/1000	PUR	Violet	6,0	400	31,0	230A1	yes	yes	36,0	80629
I-V2Y(ZN)11Y 2P 980/1000	PUR	Violet	6,0	400	31,0	230A1	yes	yes	36,0	81882
I-V2Y(ZN)11Y 4P 980/1000	PUR	Violet	7,1	400	45,0	230A1	yes	yes	65,0	80630
I-V2Y(ZN)11Y 2P 980/1000 + 2x1mm² Cu	PUR	Red	7,8	200	70,0	230A1	yes	no	60,0	82032
I-V2Y(ZN)11Y 2P 980/1000 + 3x1,5mm² Cu	PUR	Red	11,0	200	70,0	230A1	yes	no	132,0	82033

Dimensions and specifications may be changed without prior notice.

Application

HELUCOM® plastic-fibre cables are used in mechanical engineering, both in mobile and fixed applications. With different constructions, such as PUR outer sheaths, special strain relief components, hybrid construction with copper cores for power supply or only raw fibre cables, any possible fields of application are covered. Due to their solidity and their simple adjustability on site, the plastic-fibres (PMMA) are particularly suitable for applications where trouble-free data transmission is necessary under heavy-duty conditions.