


IREV-A, FLEV-A termination with slip-on method

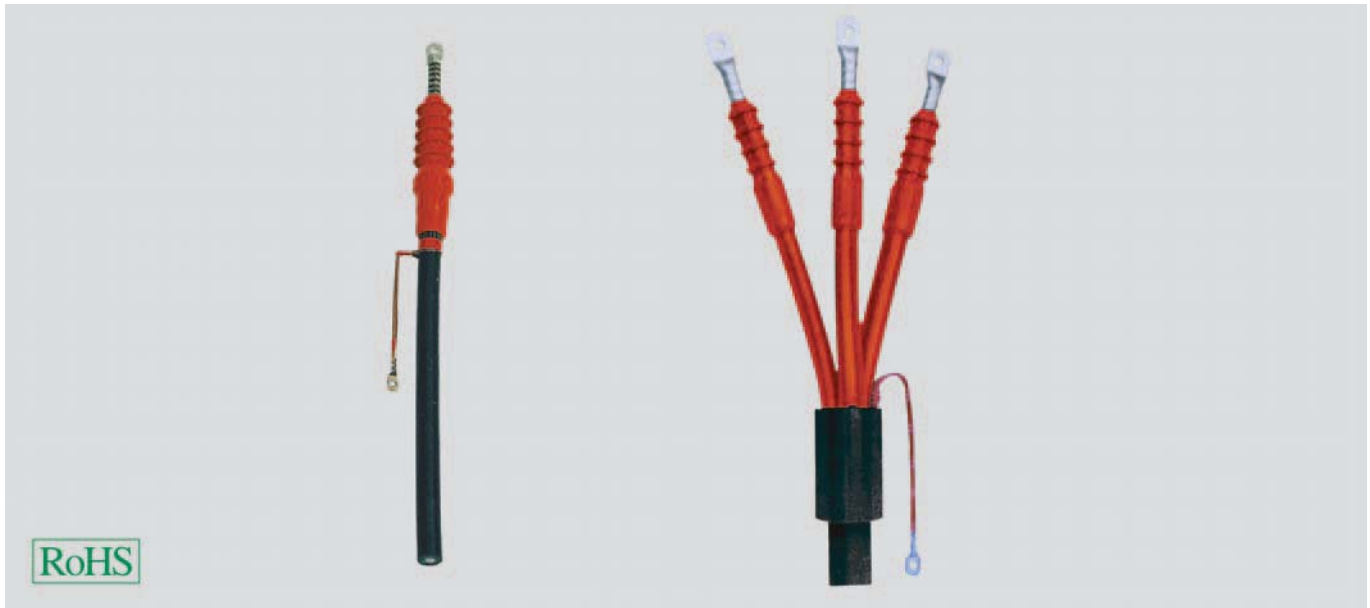

IREV-A/FLEV-A

The interior end seals and outside end seals in push-on technology are suitable for all single-conductor medium-range voltage plastic cables with differing conductor layers and sheath designs up to 18/30(36)kV.

Properties

- simple, quick assembly
- large cross-sections
- unlimited conductivity
- no pre-expansion
- no flame or heat source required
- immediately operational

Scope of delivery

- unit: 1
- one-piece suspensible silicon end lock
- integrated field control
- assembly instruction

IREV-A - indoor termination with slip-on method

Part no.	Type	Nominal voltage U _o /U _(Um)	Cross-section mm ²	Unit	Net EUR/item at a purchase of		
					1	2 - 5	6 - 10
94371	IREV-A12	6/10kV	95,0 - 240,0	1	o. r.	o. r.	o. r.
94372	IREV-A12	6/10kV	150,0 - 400,0	1	o. r.	o. r.	o. r.
94373	IREV-A12	6/10kV	240,0 - 500,0	1	o. r.	o. r.	o. r.
94374	IREV-A12	6/10kV	300,0 - 800,0	1	o. r.	o. r.	o. r.
94375	IREV-A24	12/20kV	10,0 - 35,0	1	o. r.	o. r.	o. r.
94376	IREV-A24	12/20kV	35,0 - 120,0	1	o. r.	o. r.	o. r.
94377	IREV-A24	12/20kV	70,0 - 240,0	1	o. r.	o. r.	o. r.
94378	IREV-A24	12/20kV	120,0 - 400,0	1	o. r.	o. r.	o. r.
94379	IREV-A24	12/20kV	240,0 - 630,0	1	o. r.	o. r.	o. r.
94380	IREV-A36	18/30kV	16,0 - 95,0	1	o. r.	o. r.	o. r.
94381	IREV-A36	18/30kV	50,0 - 240,0	1	o. r.	o. r.	o. r.
94382	IREV-A36	18/30kV	120,0 - 400,0	1	o. r.	o. r.	o. r.

FLEV-A - outdoor termination with slip-on method

Part no.	Type	Nominal voltage U _o /U _(Um)	Cross-section mm ²	Unit	Net EUR/item at a purchase of		
					1	2 - 5	6 - 10
94384	FLEV-A12	6/10kV	95,0 - 240,0	1	o. r.	o. r.	o. r.
94385	FLEV-A12	6/10kV	150,0 - 400,0	1	o. r.	o. r.	o. r.
94386	FLEV-A12	6/10kV	240,0 - 500,0	1	o. r.	o. r.	o. r.
94387	FLEV-A12	6/10kV	300,0 - 800,0	1	o. r.	o. r.	o. r.
94388	FLEV-A24	12/20kV	10,0 - 35,0	1	o. r.	o. r.	o. r.
94389	FLEV-A24	12/20kV	35,0 - 120,0	1	o. r.	o. r.	o. r.
94390	FLEV-A24	12/20kV	70,0 - 240,0	1	o. r.	o. r.	o. r.
94391	FLEV-A24	12/20kV	120,0 - 400,0	1	o. r.	o. r.	o. r.
94392	FLEV-A24	12/20kV	240,0 - 630,0	1	o. r.	o. r.	o. r.
94393	FLEV-A36	18/30kV	50,0 - 240,0	1	o. r.	o. r.	o. r.
94394	FLEV-A36	18/30kV	120,0 - 400,0	1	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request