

KVA-VK-MS body gland



KVA gland body MS

Gland made of brass for populating with KVA and multiple sealing inserts.

Material

Brass, nickel plated
O-ring: NBR


Technical data

Temperature range: -30°C up to +100°C

Test standard: EN50262

Application

- Plant and machine construction
- Robot construction
- Automation technology
- Vehicle construction and shipbuilding
- Rail technology
- Installation technology
- Control cabinet construction

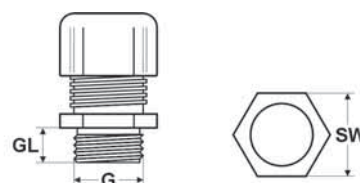

Dimensions

G Thread size
GL Thread length
SW Spanner size

metric thread

Part no.	Size Metr.	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
					up to 100	101 - 500	501 - 1000
90788	M12 x 1,5	6,0	14	100	o. r.	o. r.	o. r.
90789	M16 x 1,5	6,5	17	100	o. r.	o. r.	o. r.
90790	M20 x 1,5	7,0	22	50	o. r.	o. r.	o. r.
90792	M25 x 1,5	7,5	27	50	o. r.	o. r.	o. r.
91367	M32 x 1,5	8,0	35	25	o. r.	o. r.	o. r.
90794	M40 x 1,5	8,0	43	10	o. r.	o. r.	o. r.
90795	M50 x 1,5	10,0	54	10	o. r.	o. r.	o. r.
90796	M63 x 1,5	10,0	65	5	o. r.	o. r.	o. r.

PG thread

Part no.	Size PG	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
					up to 100	101 - 500	501 - 1000
96033	7	5,0	14	100	o. r.	o. r.	o. r.
96034	9	6,0	17	100	o. r.	o. r.	o. r.
96035	11	6,0	20	50	o. r.	o. r.	o. r.
96036	13,5	6,5	22	50	o. r.	o. r.	o. r.
96037	16	6,5	24	50	o. r.	o. r.	o. r.
96038	21	7,0	30	25	o. r.	o. r.	o. r.
96039	29	8,0	40	10	o. r.	o. r.	o. r.
96040	36	9,0	50	10	o. r.	o. r.	o. r.
96041	42	10,0	57	5	o. r.	o. r.	o. r.
96042	48	10,0	64	5	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request