


M metal cable tubes

fully inter-locked

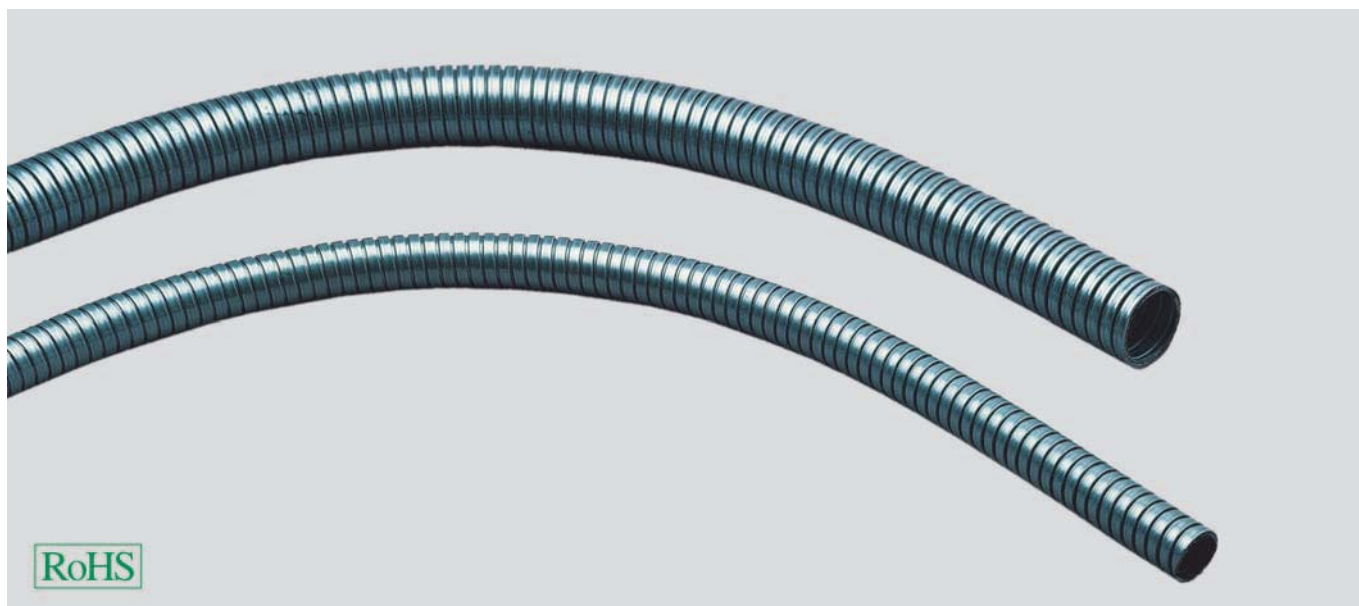

Type M

Spiral wound metallic tube with double-folded profile (Agraff profile). High tensile and torsional strength.

Application

- Plant and machine construction
- Automation technology
- Installation technology
- Control cabinet construction

Material

Cold strip DC 03 acc. to EN10139, galvanised, Fe/Zn 3 or rustproof steel

Note

Suitable connection glands:
US, LI

Technical data

Temperature range: up to +220°C

Part no.	Inner Ø mm	Outer Ø mm	Per metres	Net EUR/100 metres at a purchase of		
				up to 100	101 - 500	501 - 1000
97014	8,0	10,0	50	o. r.	o. r.	o. r.
97015	12,0	14,0	50	o. r.	o. r.	o. r.
97016	14,0	17,0	50	o. r.	o. r.	o. r.
97017	16,0	19,0	50	o. r.	o. r.	o. r.
97018	18,0	21,0	50	o. r.	o. r.	o. r.
97019	24,0	27,0	50	o. r.	o. r.	o. r.
97020	31,0	36,0	25	o. r.	o. r.	o. r.
97021	40,0	45,0	25	o. r.	o. r.	o. r.
97022	51,0	56,0	25	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request