


S-PU spiral spring by steel with outer sheath by PUR

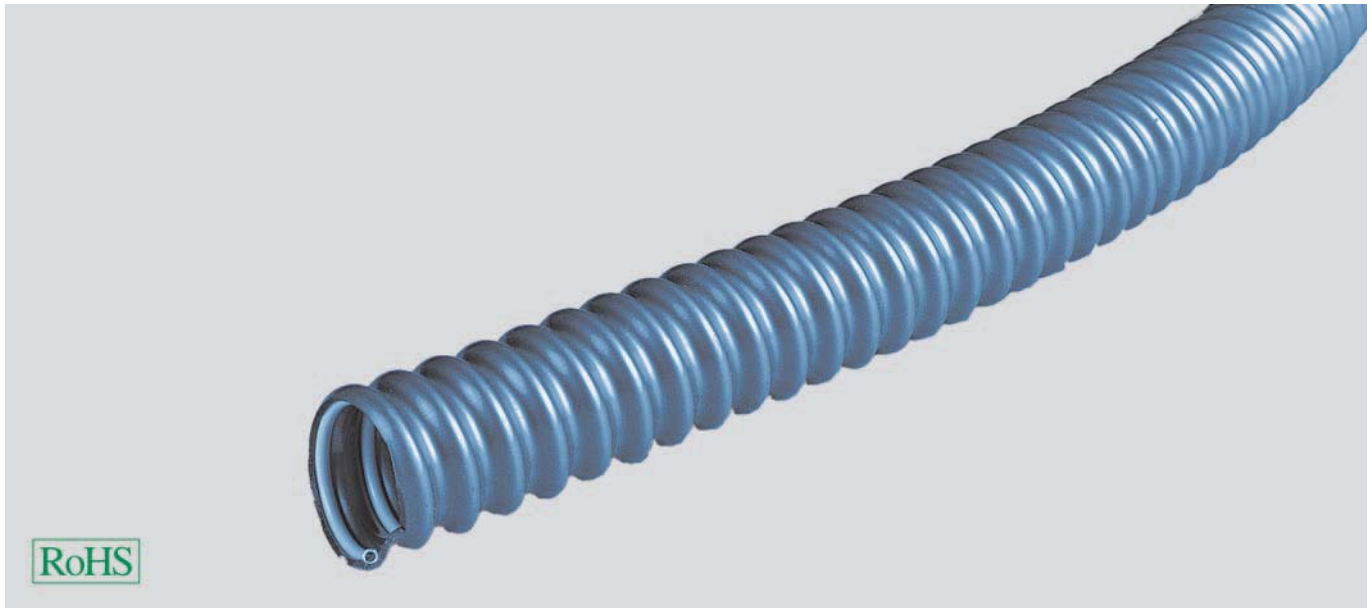

Type S-PU

Cable protection tube type S-PU with PUR outer sheath and integrated spring steel wire, extremely flexible, expandable and compressible.

Application

- Plant and machine construction
- Automation technology
- Installation technology
- Control cabinet construction

Material

Polyurethane
UV-resistant

- halogen-free
- silicone-free
- cadmium-free

Properties

Resistant to

- Oil
- Gasoline
- Microbial attack
- UV-radiation
- Weathering
- Extensively to acids and alkalis

Technical data

Temperature range: -40°C up to +80°C

Part no. blue	Inner Ø mm	Outer Ø mm	Per metres	Net EUR/100 metres at a purchase of		
				up to 100	101 - 500	501 - 1000
90464	7,0	10,0	50	O. r.	O. r.	O. r.
90465	10,0	14,0	50	O. r.	O. r.	O. r.
90466	13,0	17,0	50	O. r.	O. r.	O. r.
90467	15,0	19,0	50	O. r.	O. r.	O. r.
90468	16,0	21,0	50	O. r.	O. r.	O. r.
90469	21,0	27,0	50	O. r.	O. r.	O. r.
90470	29,0	36,0	25	O. r.	O. r.	O. r.
90471	38,0	45,0	25	O. r.	O. r.	O. r.
90473	48,0	56,0	25	O. r.	O. r.	O. r.

small pack

Part no. blue	Inner Ø mm	Outer Ø mm	Per metres	Net EUR/100 metres at a purchase of		
				up to 100	101 - 500	501 - 1000
94870	7,0	10,0	10	O. r.	O. r.	O. r.
94871	10,0	14,0	10	O. r.	O. r.	O. r.
94872	13,0	17,0	10	O. r.	O. r.	O. r.
94873	15,0	19,0	10	O. r.	O. r.	O. r.
94874	16,0	21,0	10	O. r.	O. r.	O. r.
94875	22,0	27,0	10	O. r.	O. r.	O. r.
94876	29,0	36,0	10	O. r.	O. r.	O. r.
94877	38,0	45,0	10	O. r.	O. r.	O. r.
94879	48,0	56,0	10	O. r.	O. r.	O. r.

Dimensions and specifications may be changed without prior notice.

O. r. = on request