

SD-XXL cable gland

for particularly large cable diameters



SD-XXL

For very large cable diameters. The gas and water-tight gland. The finish, similar to that of an incision sealing ring, guarantees very large clamping areas.

Material

Brass, nickel plated
Moulded seal: NBR
O-ring: NBR

Properties

- Large-area cable sealing
- Easy to assemble
- Large clamping range

Note


BSP-variant: Without O-ring at threaded connection. Sealing insert made by TPE.

Technical data

Protection class: IP 68 - 10 bar

Temperature range: -40°C up to +100°C

Test standard: EN50262

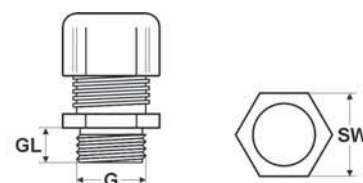

Dimensions

G Thread size
GL Thread length
SW Spanner size

metric thread

Part no.	Size Metr.	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
905570	M72 x 2,0	56,0 - 61,0	16,0	77	1	o. r.	o. r.	o. r.
905506	M75 x 1,5	56,0 - 61,0	16,0	77	1	o. r.	o. r.	o. r.
905571	M75 x 2,0	56,0 - 61,0	16,0	77	1	o. r.	o. r.	o. r.
905573	M80 x 2,0	50,0 - 56,0	18,0	90	1	o. r.	o. r.	o. r.
905572	M80 x 2,0	60,0 - 66,0	18,0	90	1	o. r.	o. r.	o. r.
905575	M85 x 2,0	63,0 - 70,0	22,0	96	1	o. r.	o. r.	o. r.
905574	M85 x 2,0	68,0 - 76,0	22,0	96	1	o. r.	o. r.	o. r.
905576	M90 x 2,0	68,0 - 76,0	22,0	98 / 96	1	o. r.	o. r.	o. r.
905577	M110 x 2,0	75,0 - 82,0	25,0	125 / 110	1	o. r.	o. r.	o. r.
905578	M120 x 2,0	88,0 - 95,0	25,0	120 / 116	1	o. r.	o. r.	o. r.

BSP thread

Part no.	Size BSP	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
90602	G 2 1/2"	48,0 - 55,0	18,0	90	1	o. r.	o. r.	o. r.
90603	G 2 1/2"	53,0 - 60,0	18,0	90	1	o. r.	o. r.	o. r.
90604	G 3"	58,0 - 65,0	18,0	100	1	o. r.	o. r.	o. r.
90605	G 3"	63,0 - 70,0	18,0	100	1	o. r.	o. r.	o. r.
90606	G 4"	68,0 - 75,0	22,0	125	1	o. r.	o. r.	o. r.
90607	G 4"	73,0 - 80,0	22,0	125	1	o. r.	o. r.	o. r.
90608	G 4"	78,0 - 85,0	22,0	125	1	o. r.	o. r.	o. r.
90609	G 4"	83,0 - 90,0	22,0	125	1	o. r.	o. r.	o. r.
93440	G 5"	91,0 - 97,0	22,0	150	1	o. r.	o. r.	o. r.
93441	G 5"	97,0 - 104,0	22,0	150	1	o. r.	o. r.	o. r.
93442	G 5"	102,0 - 109,0	22,0	150	1	o. r.	o. r.	o. r.
93443	G 5"	109,0 - 116,0	22,0	150	1	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request