


SR marking rings

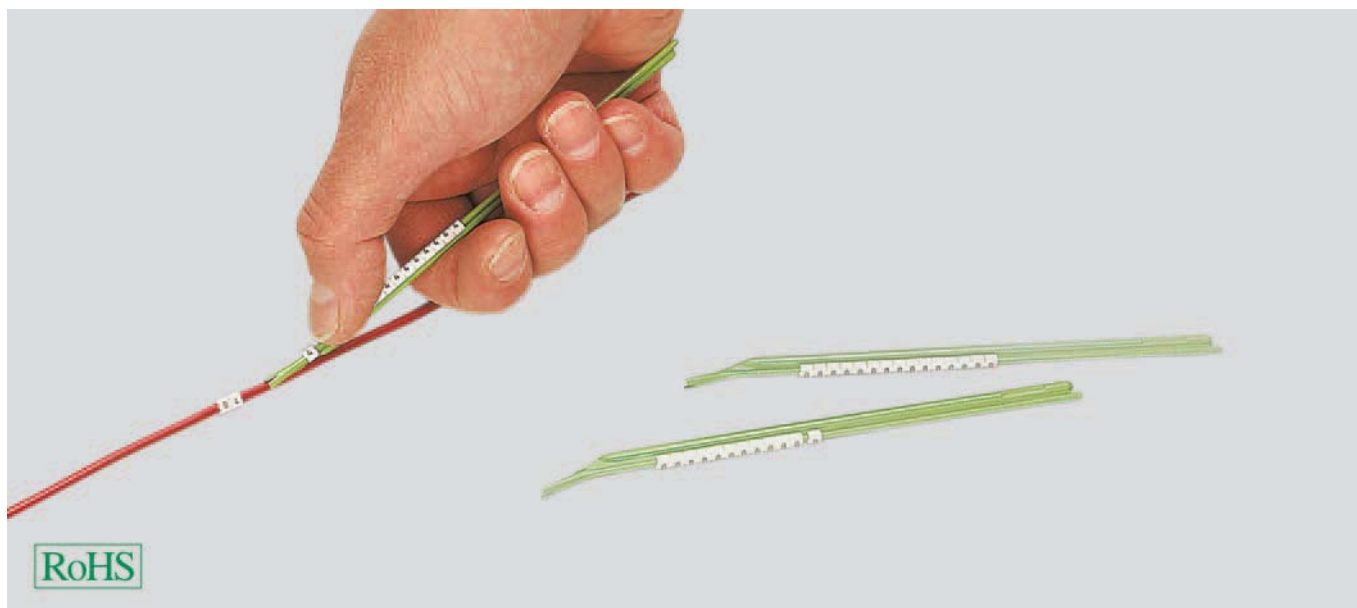

SR

Simple handling afforded by assembly rods characterise these marking rings. The nozzle-shaped assembly rod is forced onto the line and the snap-on sleeve pushed with the thumb. The marker sits tight on the line without slip. Available in white or yellow with black marking.

Application

1.0 mm to 19.0 mm
0.10 mm² - 100 mm²

Material

Copolymer

- halogen-free

Properties

Halogen-free, resistant to oils, cleaning agents, fuels and alkalis.

Technical data

Temperature range: -40°C up to +105°C

Note

Code:

Replace the XX by the number of your required letter, figure or symbol.

1 unit = 10 rods with each 30 rings.

Product 956xx up to 959xx without rod. The rod can be ordered separately.

Part no.	Colour with inscription	Type	Cross section from - to mm ²	Cable Ø from - to mm	Stick colour	Unit	Net EUR/100 unit at a purchase of		
							1	2 - 5	6 - 10
950xx	white/yellow with black	SR 01	0,1 - 0,5	1 - 1,4	brown	300	o. r.	o. r.	o. r.
951xx	white/yellow with black	SR 02	0,5 - 0,7	1,4 - 1,8	grey	300	o. r.	o. r.	o. r.
952xx	white/yellow with black	SR 03	0,8 - 1	1,9 - 2,6	green	300	o. r.	o. r.	o. r.
953xx	white/yellow with black	SR 06	1,5 - 3,4	2,6 - 3,5	red	300	o. r.	o. r.	o. r.
954xx	white/yellow with black	SR 09	2,5 - 6	3,3 - 4,5	blue	300	o. r.	o. r.	o. r.
955xx	white/yellow with black	SR 12	6 - 10	4,5 - 6	yellow	300	o. r.	o. r.	o. r.
956xx	white/yellow with black	SR 15	10 - 16	5,8 - 8,5	-	50	o. r.	o. r.	o. r.
957xx	white/yellow with black	SR 17	16 - 25	8,5 - 11,5	-	50	o. r.	o. r.	o. r.
958xx	white/yellow with black	SR 21	25 - 70	11 - 15,5	-	50	o. r.	o. r.	o. r.
959xx	white/yellow with black	SR 24	70 - 100	15 - 19	-	50	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request

Marking rings SR

How to find the correct product code.

Replace the XX by the number of your required letter, figure or symbol.

Basic colour: white

e. g.	A	△	...	00
	B	△	...	01
	C	△	...	02
	D	△	...	03
	E	△	...	04
	F	△	...	05
	G	△	...	06
	H	△	...	07
	I	△	...	08
	J	△	...	09
	K	△	...	10
	L	△	...	11
	M	△	...	12
	N	△	...	13
	O	△	...	14
	P	△	...	15
	Q	△	...	16
	R	△	...	17
	S	△	...	18
	T	△	...	19
	U	△	...	20
	V	△	...	21
	W	△	...	22
	X	△	...	23
	Y	△	...	24
Z	△	...	25	
al slash) ting current) g)	0	△	...	60
	1	△	...	61
	2	△	...	62
	3	△	...	63
	4	△	...	64
	5	△	...	65
	6	△	...	66
	7	△	...	67
	8	△	...	68
	9	△	...	69
		△	...	80
		△	...	81
	△	...	82	
	△	...	83	
	△	...	84	
	△	...	85	
	△	...	86	

Basic colour: yellow

A	△	...	30
B	△	...	31
C	△	...	32
D	△	...	33
E	△	...	34
F	△	...	35
G	△	...	36
H	△	...	37
I	△	...	38
J	△	...	39
K	△	...	40
L	△	...	41
M	△	...	42
N	△	...	43
O	△	...	44
P	△	...	45
Q	△	...	46
R	△	...	47
S	△	...	48
T	△	...	49
U	△	...	50
V	△	...	51
W	△	...	52
X	△	...	53
Y	△	...	54
Z	△	...	55
0	△	...	70
1	△	...	71
2	△	...	72
3	△	...	73
4	△	...	74
5	△	...	75
6	△	...	76
7	△	...	77
8	△	...	78
9	△	...	79
	△	...	90
	△	...	91
	△	...	92
	△	...	93
ent)	△	...	94
	△	...	95
	△	...	96

Example: Product code 95435 indicates ring type SR 09, letter „F“ in yellow.