

STK-PA cable gland to DIN



STK-PA

The polyamide cable gland to DIN 46320.

Application

- Plant and machine construction
- Robot construction
- Automation technology
- Vehicle construction and shipbuilding
- Rail technology
- Installation technology
- Control cabinet construction

Material

Polyamide
Moulded seal: SBR/NBR

- halogen-free
- phosphor-free
- silicone-free
- cadmium-free

Technical data

Protection class: IP 54

Temperature range: -30°C up to +80°C

Test standard: EN50262



Dimensions

G Thread size
GL Thread length
SW Spanner size

metric thread

Part no. light grey RAL 7035	Size Metr.	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
92819	M12 x 1,5	5,0 - 8,0	11,0	19	50	o. r.	o. r.	o. r.
92820	M16 x 1,5	7,0 - 9,0	11,0	19	50	o. r.	o. r.	o. r.
92821	M20 x 1,5	8,0 - 12,0	11,0	24	50	o. r.	o. r.	o. r.
92823	M25 x 1,5	11,0 - 14,0	11,0	27	50	o. r.	o. r.	o. r.
92824	M25 x 1,5	13,0 - 17,0	11,0	32	50	o. r.	o. r.	o. r.
92825	M32 x 1,5	18,0 - 26,0	11,0	42	10	o. r.	o. r.	o. r.
92826	M40 x 1,5	23,0 - 26,0	11,0	42	10	o. r.	o. r.	o. r.
92827	M50 x 1,5	25,0 - 33,0	11,0	53	10	o. r.	o. r.	o. r.
92828	M50 x 1,5	32,0 - 40,0	11,0	60	5	o. r.	o. r.	o. r.
92829	M63 x 1,5	38,0 - 44,0	11,0	65	5	o. r.	o. r.	o. r.

PG thread

Part no. light grey RAL 7035	Size PG	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
90559	7	3,0 - 6,0	8,0	15	50	o. r.	o. r.	o. r.
90560	9	4,5 - 7,0	8,0	19	50	o. r.	o. r.	o. r.
90561	11	6,0 - 9,0	8,0	22	50	o. r.	o. r.	o. r.
90562	13,5	9,0 - 12,0	9,0	24	50	o. r.	o. r.	o. r.
90563	16	11,0 - 14,0	10,0	27	50	o. r.	o. r.	o. r.
90564	21	14,0 - 18,0	11,0	33	25	o. r.	o. r.	o. r.
90565	29	18,0 - 25,0	11,0	42	25	o. r.	o. r.	o. r.
90566	36	25,0 - 32,0	13,0	53	10	o. r.	o. r.	o. r.
90567	42	30,0 - 38,0	13,0	60 / 55	5	o. r.	o. r.	o. r.
90568	48	34,0 - 42,0	14,0	65 / 60	5	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request

STK-PA cable gland

with incision sealing ring



STK-PA with incision ring

The polyamide cable gland to DIN 46320 with incision sealing ring.

Application

- Plant and machine construction
- Robot construction
- Automation technology
- Vehicle construction and shipbuilding
- Rail technology
- Installation technology
- Control cabinet construction

Material

Polyamide
Moulded seal: NBR

- halogen-free
- phosphor-free
- silicone-free
- cadmium-free


Note

Protection classification IP 65 with an additional O-ring on the external thread

Technical data

Protection class: IP 54

Temperature range: -20°C up to +60°C

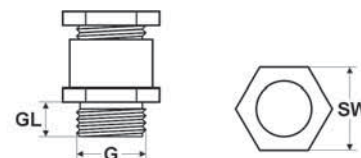

Dimensions

G Thread size
GL Thread length
SW Spanner size

PG thread

Part no. grey RAL 7035	Size PG	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
904231	9	4,0 - 10,0	8,0	19 / 16	50	o. r.	o. r.	o. r.
904232	11	6,5 - 12,0	8,0	22 / 19	50	o. r.	o. r.	o. r.
904233	13,5	6,5 - 13,5	9,0	24 / 21	50	o. r.	o. r.	o. r.
904234	16	6,5 - 16,0	10,0	27 / 23	50	o. r.	o. r.	o. r.
904235	21	9,0 - 20,0	11,0	33 / 30	50	o. r.	o. r.	o. r.
904236	29	17,0 - 28,0	11,0	42 / 40	25	o. r.	o. r.	o. r.
904237	36	23,0 - 34,0	13,0	53 / 50	10	o. r.	o. r.	o. r.
904238	42	29,0 - 40,0	13,0	60 / 55	5	o. r.	o. r.	o. r.
904239	48	35,0 - 46,0	14,0	65 / 60	5	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request