


TYH cable tie with steel lug lock

a product by Thomas & Betts

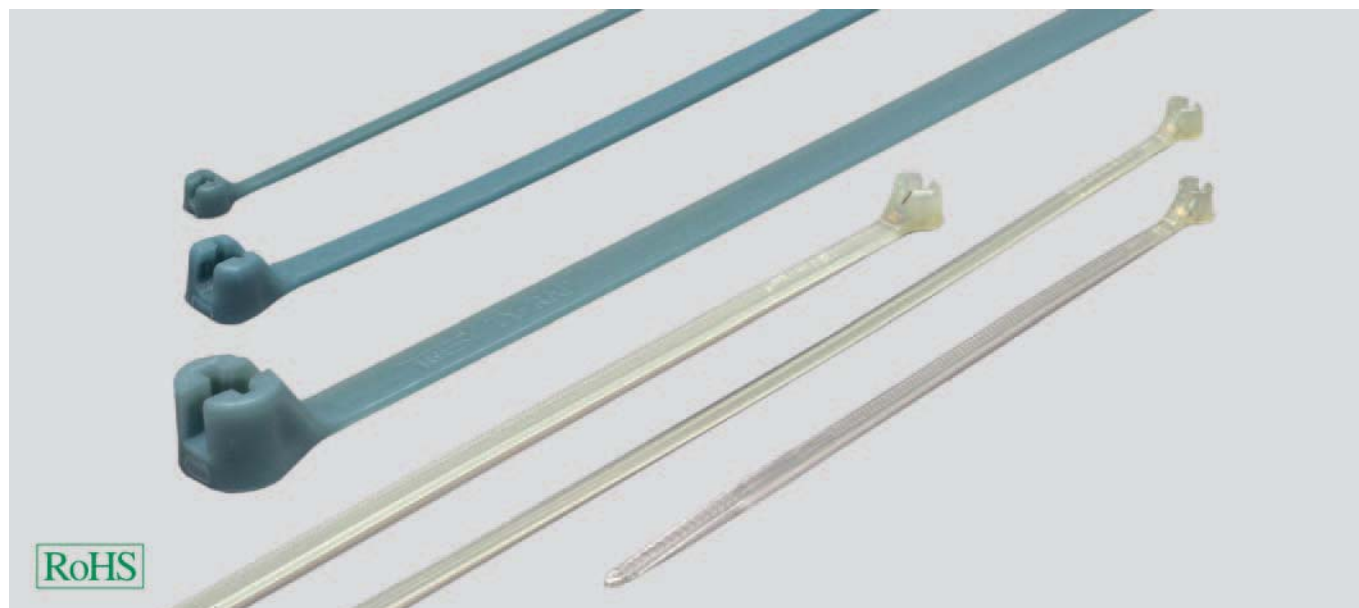

TY-RAP®

TY-RAP® cable tie with steel lug lock made of corrosion-resistant, non-magnetic steel.

This technology enables the cable tie to offer excellent binding properties even under the most rigorous conditions such as heat, cold, humidity etc. and makes it insensitive to vibrations and external influences.

Material

H = Polyamide 6.6 (heat-stabilised)

- halogen-free

Technical data

Temperature range: -40°C up to +105°C

Flammability acc. to UL 94: V2

high stabilized

Part no.	Type T & B	Colour	Length mm	Width mm	Bundle Ø mm	Capacity N	Unit	Net EUR/100 items at a purchase of		
								up to 1000	1001 - 5000	5001 - 10000
97280	TYH 23M	transparent	92,0	2,4	16,0	80,0	1000	o. r.	o. r.	o. r.
96481	TYH 232M	transparent	203,0	2,4	50,0	80,0	1000	o. r.	o. r.	o. r.
96577	TYH 24M	transparent	140,0	3,6	29,0	130,0	1000	o. r.	o. r.	o. r.
98520	TYH 242M	transparent	208,0	3,6	50,0	130,0	1000	o. r.	o. r.	o. r.
97249	TYH 26M	transparent	284,0	3,6	76,0	130,0	1000	o. r.	o. r.	o. r.
97213	TYH 25M	transparent	186,0	4,8	45,0	220,0	1000	o. r.	o. r.	o. r.
98521	TYH 253M	transparent	290,0	4,8	78,0	220,0	1000	o. r.	o. r.	o. r.
96291	TYH 28M	transparent	360,0	4,8	102,0	220,0	1000	o. r.	o. r.	o. r.
98522	TYH 272M	transparent	222,0	7,6	50,0	540,0	500	o. r.	o. r.	o. r.
97154	TYH 27M	transparent	340,0	7,0	90,0	540,0	500	o. r.	o. r.	o. r.
97250	TYH 29M	transparent	771,0	6,9	229,0	530,0	500	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request