



UNI-DICHT-MS

Sealing cable gland. Nickel-coated brass with colour-coded inserts made by TPE.

Application

- Plant and machine construction
- Robot construction
- Automation technology
- Vehicle construction and shipbuilding
- Rail technology
- Installation technology
- Control cabinet technology

Material

Brass, nickel plated
Moulded seal: TPE

Properties


- Large-area cable sealing
- Easy to assemble
- Large clamping areas

Technical data

Protection class: IP 68 - 10 bar

Temperature range: -40°C up to +130°C

Test standard: EN50262

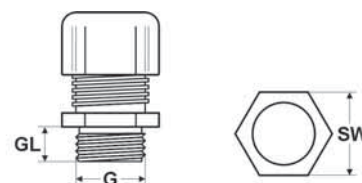

Dimensions

G Thread size
GL Thread length
SW Spanner size

metric thread

Part no.	Size Metr.	Sealing insert colour	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
							up to 100	101 - 500	501 - 1000
904061	M12 x 1,5	yellow/short	4,0 - 6,5	5,0	14	50	o. r.	o. r.	o. r.
904062	M16 x 1,5	yellow	4,0 - 6,5	6,0	18	50	o. r.	o. r.	o. r.
904063	M16 x 1,5	grey	5,0 - 8,0	6,0	18	50	o. r.	o. r.	o. r.
904064	M16 x 1,5	black	6,5 - 9,5	6,0	18	50	o. r.	o. r.	o. r.
904065	M20 x 1,5	yellow	4,0 - 6,5	6,5	22	50	o. r.	o. r.	o. r.
904066	M20 x 1,5	grey	5,0 - 8,0	6,5	22	50	o. r.	o. r.	o. r.
904067	M20 x 1,5	black	6,5 - 9,5	6,5	22	50	o. r.	o. r.	o. r.
904068	M20 x 1,5	green	7,0 - 10,5	6,5	22	50	o. r.	o. r.	o. r.
904069	M20 x 1,5	red	9,0 - 13,0	6,5	22	50	o. r.	o. r.	o. r.
904070	M25 x 1,5	yellow	4,0 - 6,5	7,5	28	50	o. r.	o. r.	o. r.
904071	M25 x 1,5	grey	5,0 - 8,0	7,5	28	50	o. r.	o. r.	o. r.
904072	M25 x 1,5	black	6,5 - 9,5	7,5	28	50	o. r.	o. r.	o. r.
904073	M25 x 1,5	green	7,0 - 10,5	7,5	28	50	o. r.	o. r.	o. r.
904074	M25 x 1,5	red	9,0 - 13,0	7,5	28	50	o. r.	o. r.	o. r.
904075	M25 x 1,5	white	11,5 - 15,5	7,5	28	50	o. r.	o. r.	o. r.
904076	M32 x 1,5	green	7,0 - 10,5	8,0	35	25	o. r.	o. r.	o. r.
904077	M32 x 1,5	red	9,0 - 13,0	8,0	35	25	o. r.	o. r.	o. r.
904078	M32 x 1,5	white	11,5 - 15,5	8,0	35	25	o. r.	o. r.	o. r.
904079	M32 x 1,5	blue	14,0 - 18,0	8,0	35	25	o. r.	o. r.	o. r.
904080	M32 x 1,5	brown	17,0 - 20,5	8,0	35	25	o. r.	o. r.	o. r.
904081	M40 x 1,5	blue	14,0 - 18,0	8,0	43	10	o. r.	o. r.	o. r.
904082	M40 x 1,5	brown	17,0 - 20,5	8,0	43	10	o. r.	o. r.	o. r.
904083	M40 x 1,5	orange	20,0 - 25,0	8,0	43	10	o. r.	o. r.	o. r.
904084	M40 x 1,5	light yellow	24,0 - 28,0	8,0	43	10	o. r.	o. r.	o. r.
904085	M50 x 1,5	anthracite	27,0 - 32,0	10,0	54	5	o. r.	o. r.	o. r.
904086	M50 x 1,5	light blue	29,0 - 34,0	10,0	54	5	o. r.	o. r.	o. r.
904087	M50 x 1,5	pink	32,0 - 36,0	10,0	54	5	o. r.	o. r.	o. r.

Continuation ►

o. r. = on request

UNI-DICHT-MS cable gland



PG thread

Part no.	Size PG	Sealing insert colour	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 Items at a purchase of		
							up to 100	101 - 500	501 - 1000
904088	7	yellow	4,0 - 6,5	5,0	14	50	o. r.	o. r.	o. r.
904089	9	yellow	4,0 - 6,5	6,0	17	50	o. r.	o. r.	o. r.
904090	9	grey	5,0 - 8,0	6,0	17	50	o. r.	o. r.	o. r.
904091	9	black	6,5 - 9,5	6,0	17	50	o. r.	o. r.	o. r.
904092	11	yellow	4,0 - 6,5	6,0	20	50	o. r.	o. r.	o. r.
904093	11	grey	5,0 - 8,0	6,0	20	50	o. r.	o. r.	o. r.
904094	11	black	6,5 - 9,5	6,0	20	50	o. r.	o. r.	o. r.
904095	11	green	7,0 - 10,5	6,0	20	50	o. r.	o. r.	o. r.
904096	13,5	yellow	4,0 - 6,5	6,5	22	50	o. r.	o. r.	o. r.
904097	13,5	grey	5,0 - 8,0	6,5	22	50	o. r.	o. r.	o. r.
904098	13,5	black	6,5 - 9,5	6,5	22	50	o. r.	o. r.	o. r.
904099	13,5	green	7,0 - 10,5	6,5	22	50	o. r.	o. r.	o. r.
904100	13,5	red	9,0 - 13,0	6,5	22	50	o. r.	o. r.	o. r.
904101	16	yellow	4,0 - 6,5	6,5	24	50	o. r.	o. r.	o. r.
904102	16	grey	5,0 - 8,0	6,5	24	50	o. r.	o. r.	o. r.
904103	16	black	6,5 - 9,5	6,5	24	50	o. r.	o. r.	o. r.
904104	16	green	7,0 - 10,5	6,5	24	50	o. r.	o. r.	o. r.
904105	16	red	9,0 - 13,0	6,5	24	50	o. r.	o. r.	o. r.
904106	16	white	11,5 - 15,5	6,5	24	50	o. r.	o. r.	o. r.
904107	21	green	7,0 - 10,5	7,0	30	25	o. r.	o. r.	o. r.
904108	21	red	9,0 - 13,0	7,0	30	25	o. r.	o. r.	o. r.
904109	21	white	11,5 - 15,5	7,0	30	25	o. r.	o. r.	o. r.
904110	21	blue	14,0 - 18,0	7,0	30	25	o. r.	o. r.	o. r.
904111	21	brown	17,0 - 20,5	7,0	30	25	o. r.	o. r.	o. r.
904112	29	blue	14,0 - 18,0	8,0	40	10	o. r.	o. r.	o. r.
904113	29	brown	17,0 - 20,5	8,0	40	10	o. r.	o. r.	o. r.
904114	29	orange	20,0 - 25,0	8,0	40	10	o. r.	o. r.	o. r.
904115	29	light yellow	24,0 - 28,0	8,0	40	10	o. r.	o. r.	o. r.
904116	36	anthracite	27,0 - 32,0	9,0	50	10	o. r.	o. r.	o. r.
904117	36	light blue	29,0 - 34,0	9,0	50	10	o. r.	o. r.	o. r.
904118	36	pink	32,0 - 36,0	9,0	50	10	o. r.	o. r.	o. r.
904119	42	white	36,0 - 40,0	10,0	57	5	o. r.	o. r.	o. r.
904120	48	white	39,0 - 44,0	10,0	64	5	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request