

UNI-DICHT-VK-PVDF body gland

Polyvinylidene fluoride



UNI-DICHT-VK gland body PVDF

Gland body made of PVDF for populating with inserts made by TPE or silicone. For use in chemical industry, at high temperatures, or long lasting UV-stress.

Application

- Chemical industry
- Food industry
- Plant and machine construction
- Automation technology
- Installation technology
- Control cabinet construction

Material

PVDF

- phosphor-free
- cadmium-free


Note

Use short-sized inserts when using gland bodies of size M12x1.5 or M20x1.5.

Technical data

Temperature range: -40°C up to +150°C

Test standard: EN50262

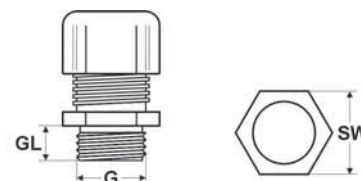

Dimensions

G Thread size
GL Thread length
SW Spanner size

metric thread

Part no.	Size Metr.	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
					up to 100	101 - 500	501 - 1000
904240	M12 x 1,5	8,0	15	50	o. r.	o. r.	o. r.
904241	M16 x 1,5	9,0	19	50	o. r.	o. r.	o. r.
904242	M20 x 1,5	9,0	24	50	o. r.	o. r.	o. r.
904243	M25 x 1,5	9,0	29	50	o. r.	o. r.	o. r.
904244	M32 x 1,5	11,0	38	25	o. r.	o. r.	o. r.
904245	M40 x 1,5	11,5	46	10	o. r.	o. r.	o. r.
904246	M50 x 1,5	13,0	56	5	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request