

UNI-DICHT-VK-stainless steel body gland

stainless steel



UNI-DICHT-VK gland body stainless steel

Gland body made of stainless steel for populating with inserts made by TPE. For use in chemical industry, at high temperatures, or long lasting UV-stress.

Material

Stainless steel 1.4305 / AISI 303

Note

When using inserts made by silicone temperature range: -60°C to +200°C.


Technical data

Temperature range: up to +200°C

Test standard: EN50262

Application

- Chemical industry
- Food industry
- Plant and machine construction
- Automation technology
- Installation technology
- Control cabinet construction

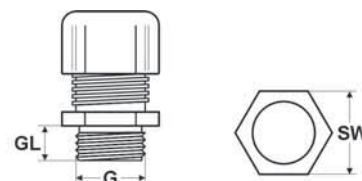

Dimensions

G Thread size
GL Thread length
SW Spanner size

metric thread

Part no.	Size Metr.	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
					up to 100	101 - 500	501 - 1000
904247	M12 x 1,5	5,0	14	50	o. r.	o. r.	o. r.
904248	M16 x 1,5	6,0	19	50	o. r.	o. r.	o. r.
904249	M20 x 1,5	6,5	22	50	o. r.	o. r.	o. r.
904250	M25 x 1,5	7,5	27	50	o. r.	o. r.	o. r.
904251	M32 x 1,5	8,0	36	25	o. r.	o. r.	o. r.
904252	M40 x 1,5	8,0	46	10	o. r.	o. r.	o. r.
904253	M50 x 1,5	10,0	55	5	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request