


LAN Cable

Category 8

HELUKAT® 1200

S/FTP duplex

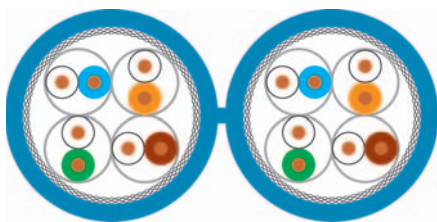


Cable structure

Inner conductor diameter:
Conductor material:
Core insulation:
Core colours:
Shielding 1:
Screen over stranding element:
Screen 1 over stranding:
Screen 2 over stranding:
Outer sheath material:
Cable dimensions:
Outer sheath colour:

S/FTP 2x(4x2xAWG 22/1) FRNC

0,64 mm
Copper, bare
Foam-skin-PE
wh/bu, wh/og, wh/gn, wh/bn
-
Polyester foil, aluminium-lined
Cu braid
-
FRNC
approx. 7,7 mm x 16,5 mm
Blue similar to RAL 5015

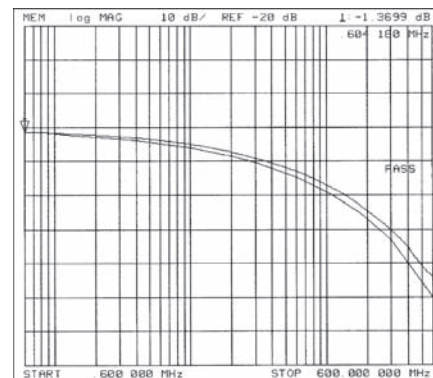

Electrical data

Characteristic impedance:

100 Ohm \pm 15 ohm at 1 to 100 MHz
100 Ohm \pm 20 ohm at 101 to 1200 MHz
120 Ohm/km max.
43 nF/km nom.
79 %

Loop resistance:

Mutual capacitance:

Rel. propagation velocity:

Typical values


Frequency (MHz)	10	16	62,5	100	200	300	600	1000	1200
Attenuation (dB/100m)	4,9	6,3	12,7	16,3	23,5	29,4	42,8	53,0	59,0
Next (db)	100,0	100,0	95,0	93,0	90,0	87,0	81,0	78,0	77,0
ACR (db)	95,1	93,7	82,3	76,7	66,5	57,6	38,2	25,0	18,0

Technical data

Weight: approx. 133 kg/km
bending radius, repeated: 72 mm
Operating temperature range min.: -20°C
Operating temperature range max.: +60°C
Caloric load, approx. value: 1,50 MJ/m
Copper weight: 80,00 kg/km

Norms

Acc. to ISO/IEC 11801, Acc. to EN 50173, Acc. to EIA/TIA 568-A, Category 8 (draft),
Flame-retardant acc. to IEC 60332-3, Smoke density acc. to IEC 61034, Halogen-free acc. to 60754-2, Corrosiveness acc. to EN50267-2-3

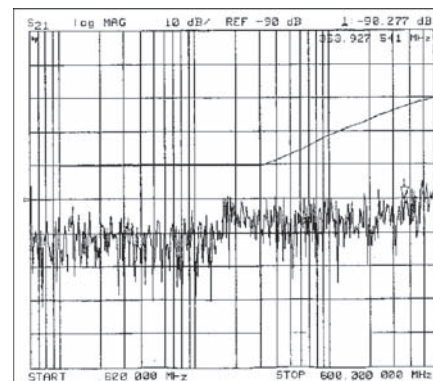

Application

HELUKAT®1200 data cables are used in the tertiary, but also in the secondary level of a network. They are characterized by large performance reserves and outstanding performance. They can be used to implement services such as Gigabit Ethernet, Fast Ethernet, Ethernet, ATM155, FDDI, token ring 4/16 Mbit/s or ISDN absolutely trouble-free. Likewise, the mechanical characteristics are perfectly suited for the application in tight cable channels and platforms due to their optimized construction.

Part no.

800647, S/FTP 2x(4x2xAWG 22/1) FRNC (S-STP)

Dimensions and specifications may be changed without prior notice.