


H05G-U / -K / H07G-U / -R / -K

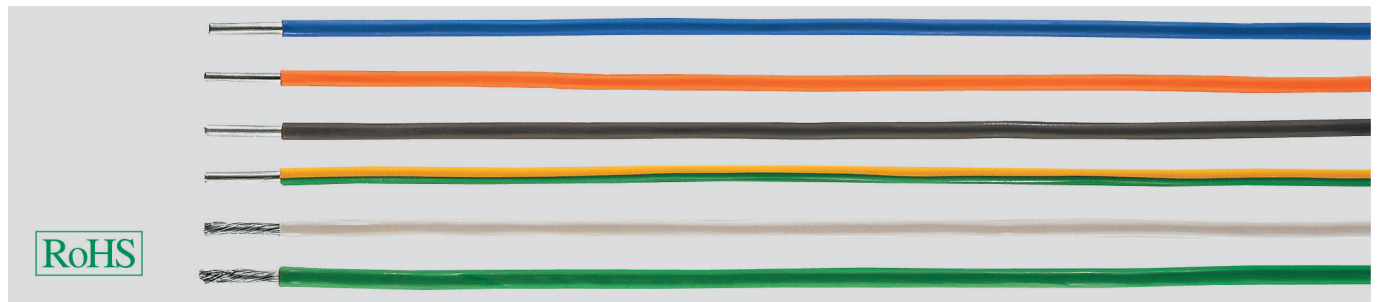

Technical data

- Heat-resistant (+110°C)
rubber-insulated cable to
DIN VDE 0285-525-2-42/
DIN EN 50525-2-42
- Max. permissible operating temperature**
at conductor +110°C
- Lowest ambient temperatures**
flexing up to -25°C
fixed installation up to -40°C
- Nominal voltage**
H05G = U_0/U 300/500 V
H07G = U_0/U 450/750 V
- Test voltage**
H05G = 2000 V
H05G = 2500 V
- Minimum bending radius**
fixed installation
core $\varnothing \leq 8$ mm: 4x core \varnothing
core $\varnothing > 8-12$ mm: 5x core \varnothing
core $\varnothing > 12$ mm: 6x core \varnothing

Cable structure

- Tinned Cu-conductor, to
DIN VDE 0295, IEC 60228, BS 6360
class 1: single-wire
class 2: multi-wire
class 5: fine-wire
- Separating foil over conductor permitted
- Core insulation of rubber
compound type EI3 (EVA) to
DIN VDE 0207-363-1 / DIN EN 50363-1

Properties

- Single core colours green and yellow can only be applied where the safety regulations are allowed
- The identification for the lighting chain cable is green permitted

Note

- Please complete the part number for these cores by adding the suffix for the colour required as per the list:
00 = green
01 = black
02 = blue
03 = brown
04 = grey
05 = orange
06 = pink
07 = turquoise
08 = white
09 = violet
10 = yellow
11 = green-yellow
- bare conductor on request
- AWG sizes are approximate equivalent values. The actual cross-section is in mm².

Application

For inside wiring of switch boards and distributors as well as of operating parts such as in or on lights, for the connection of electric heaters with a nominal voltage up to 1000 V alternating voltage or up to 750 V direct voltage against ground. These single cores are all allowed for laying in tubes, on and under plaster.

CE= The product is conformed with the EC Low-Voltage Directive 2006/95/EC.

H05G-U (single wire)

Part no.	Cross-section mm ²	Outer Ø min. - max. mm	Cop. weight kg / km	Weight app. kg / km	AWG-No.
541xx	0,5	1,9 - 2,4	4,8	10,0	20
542xx	0,75	2,1 - 2,6	7,2	15,0	18
543xx	1	2,2 - 2,8	9,6	16,0	17

H05G-K (fine wire)

Part no.	Cross-section mm ²	Outer Ø min. - max. mm	Cop. weight kg / km	Weight app. kg / km	AWG-No.
550xx	0,5	2,1 - 2,6	4,8	13,0	20
551xx	0,75	2,2 - 2,8	7,2	16,0	18
552xx	1	2,4 - 2,9	9,6	22,0	17

H07G-U (single wire)

Part no.	Cross-section mm ²	Outer Ø min. - max. mm	Cop. weight kg / km	Weight app. kg / km	AWG-No.
544xx	1,5	2,8 - 3,5	14,4	24,0	16
545xx	2,5	3,4 - 4,3	24,0	35,0	14
546xx	4	4,0 - 5,0	38,0	53,0	12

H07G-K (fine wire)

Part no.	Cross-section mm ²	Outer Ø min. - max. mm	Cop. weight kg / km	Weight app. kg / km	AWG-No.
553xx	1,5	3,0 - 3,7	14,4	24,0	16
554xx	2,5	3,6 - 4,5	24,0	42,0	14
555xx	4	4,3 - 5,4	38,0	61,0	12
556xx	6	4,8 - 6,0	58,0	78,0	10
557xx	10	6,0 - 7,6	96,0	130,0	8
558xx	16	7,1 - 8,9	154,0	212,0	6
559xx	25	8,8 - 11,0	240,0	323,0	4
560xx	35	10,1 - 12,6	336,0	422,0	2
561xx	50	11,9 - 14,9	480,0	527,0	1
562xx	70	13,6 - 17,0	672,0	726,0	2/0
563xx	95	15,5 - 19,3	912,0	937,0	3/0
564xx	120	17,1 - 21,4	1152,0	1192,0	4/0

H07G-R (multi wire)

Part no.	Cross-section mm ²	Outer Ø min. - max. mm	Cop. weight kg / km	Weight app. kg / km	AWG-No.
547xx	6	4,7 - 5,9	58,0	72,0	10
548xx	10	6,0 - 7,4	96,0	123,0	8
549xx	16	6,8 - 8,5	154,0	184,0	6

Dimensions and specifications may be changed without prior notice. (RK01)