
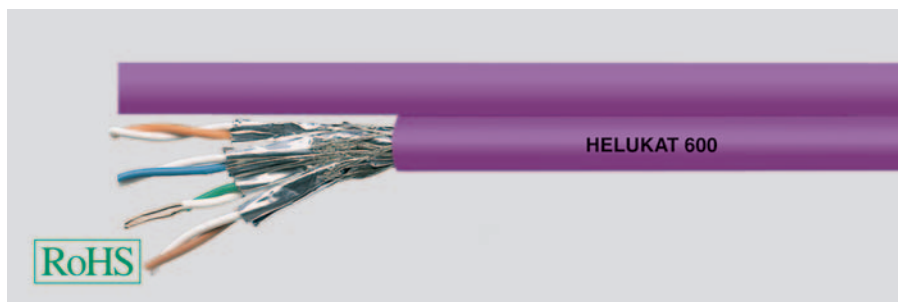


LAN Cable

Category 7e

HELUKAT® 600

S/FTP duplex

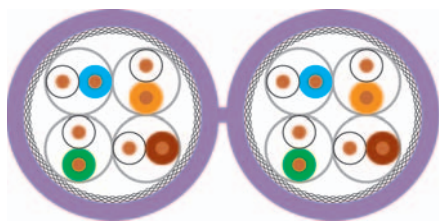

Cable structure

Inner conductor diameter:

Conductor material:

Core insulation:

Core colours:

Shielding 1:

Screen over stranding element:

Screen 1 over stranding:

Screen 2 over stranding:

Outer sheath material:

Cable dimensions:

Outer sheath colour:

S/FTP 2x(4x2xAWG 23/1) FRNC

0,57 mm

Copper, bare

Foam-skin-PE

wh/bu, wh/og, wh/gn, wh/bn

-

Polyester foil, aluminium-lined


Cu braid

-

FRNC

approx. 7,5 mm x 16,0 mm

Blue Lilac similar to RAL 4005

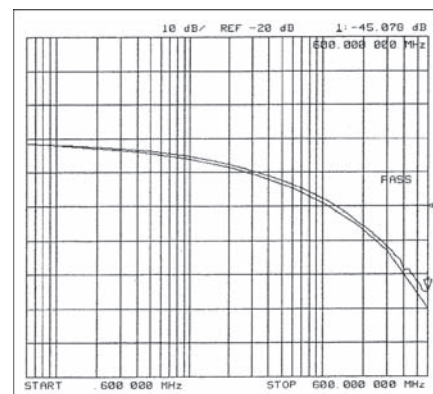

Electrical data

Characteristic impedance:

100 Ohm \pm 15 ohm at 1 to 100 MHz

100 Ohm \pm 20 ohm at 101 to 1000 MHz

130 Ohm/km max.

43 nF/km nom.

Rel. propagation velocity:

79 %

Typical values

Frequency (MHz)	10	16	62,5	100	200	300	600	900	1000
Attenuation (dB/100m)	5,6	7,1	13,9	17,5	25,2	32,1	44,9	55,0	58,0
Next (db)	100,0	100,0	96,0	94,0	88,0	84,0	73,0	71,0	69,0
ACR (db)	94,4	92,9	82,1	76,5	62,8	51,9	28,1	16,0	9,0

Technical data

Weight:

approx. 120 kg/km

bending radius, repeated:

60 mm

Operating temperature range min.:

-20°C

Operating temperature range max.:

+60°C

Caloric load, approx. value:

1,20 MJ/m

Copper weight:


56,00 kg/km

Norms

Acc. to ISO/IEC 11801, Acc. to EN 50173, Acc. to EIA/TIA 568-A, Category 7e,

Flame-retardant acc. to IEC 60332-3, Smoke density acc. to IEC 61034, Halogen-free acc. to

60754-2, Corrosiveness acc. to EN50267-2-3

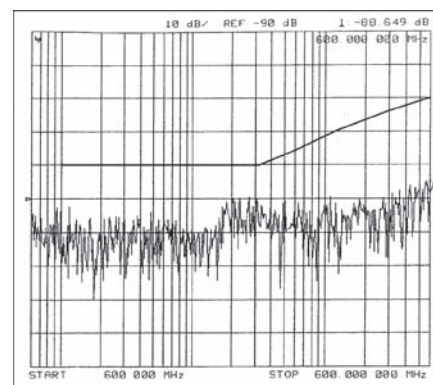

Application

HELUKAT®600 data cables are used in the tertiary, but also in the secondary level of a network. They are characterized by large performance reserves and outstanding performance. They can be used to implement services such as Gigabit Ethernet, Fast Ethernet, Ethernet, ATM155, FDDI, token ring 4/16 Mbit/s or ISDN absolutely trouble-free. Likewise, the mechanical characteristics are perfectly suited for the application in tight cable channels and platforms due to their optimized construction.

Part no.

81446, S/FTP 2x(4x2xAWG 23/1) FRNC (S-STP)

Dimensions and specifications may be changed without prior notice.