

KVA-MFD-MS cable gland

with multiple sealing inserts



KVA-MFD-MS

Sealing cable gland with multiple sealing inserts.

Application

- Plant and machine construction
- Robot construction
- Automation technology
- Vehicle construction and shipbuilding
- Rail technology
- Installation technology
- Control cabinet construction

Material

Brass, nickel plated
Moulded seal: Soft PVC
O-ring: NBR

Properties

- Large-area cable sealing
- Easy to assemble

Note


IP 68, subject to the bore diameter in the sealing insert area and cable diameter being identical.

Technical data

Protection class: IP 68 - 10 bar

Temperature range: -20°C up to +105°C

Test standard: EN50262

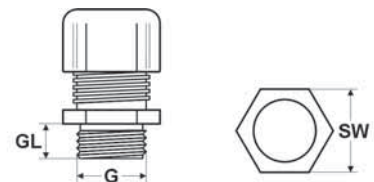

Dimensions

G Thread size
GL Thread length
SW Spanner size

metric thread

Part no.	Size Metr.	Number holes x cable-Ø mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
93400	M16 x 1,5	2 x 1,0	6,5	17	100	o. r.	o. r.	o. r.
93401	M16 x 1,5	2 x 3,0	6,5	17	100	o. r.	o. r.	o. r.
93402	M16 x 1,5	4 x 3,0	6,5	17	100	o. r.	o. r.	o. r.
93403	M16 x 1,5	2 x 4,0	6,5	17	100	o. r.	o. r.	o. r.
93404	M16 x 1,5	1 x 5,0	6,5	17	100	o. r.	o. r.	o. r.
93405	M20 x 1,5	6 x 2,0	7,0	22	50	o. r.	o. r.	o. r.
93406	M20 x 1,5	2 x 2,3	7,0	22	50	o. r.	o. r.	o. r.
93407	M20 x 1,5	6 x 2,5	7,0	22	50	o. r.	o. r.	o. r.
93408	M20 x 1,5	2 x 3,0	7,0	22	50	o. r.	o. r.	o. r.
93409	M20 x 1,5	3 x 3,0	7,0	22	50	o. r.	o. r.	o. r.
93410	M20 x 1,5	2 x 5,0	7,0	22	50	o. r.	o. r.	o. r.
93411	M25 x 1,5	7 x 2,0	7,5	27	50	o. r.	o. r.	o. r.
93412	M25 x 1,5	2 x 4,0	7,5	27	50	o. r.	o. r.	o. r.
93413	M25 x 1,5	4 x 4,0	7,5	27	50	o. r.	o. r.	o. r.
93414	M25 x 1,5	6 x 4,0	7,5	27	50	o. r.	o. r.	o. r.
93415	M25 x 1,5	2 x 6,0	7,5	27	50	o. r.	o. r.	o. r.
93416	M25 x 1,5	3 x 7,0	7,5	27	50	o. r.	o. r.	o. r.
93417	M32 x 1,5	21 x 2,0	8,0	35	25	o. r.	o. r.	o. r.
93418	M32 x 1,5	8 x 3,0	8,0	35	25	o. r.	o. r.	o. r.
93419	M32 x 1,5	6 x 4,0	8,0	35	25	o. r.	o. r.	o. r.
93420	M32 x 1,5	8 x 4,0	8,0	35	25	o. r.	o. r.	o. r.
93421	M32 x 1,5	4 x 5,0	8,0	35	25	o. r.	o. r.	o. r.
93422	M32 x 1,5	4 x 6,0	8,0	35	25	o. r.	o. r.	o. r.
93423	M32 x 1,5	6 x 6,5	8,0	35	25	o. r.	o. r.	o. r.
93424	M32 x 1,5	3 x 7,0	8,0	35	25	o. r.	o. r.	o. r.
93425	M32 x 1,5	4 x 8,0	8,0	35	25	o. r.	o. r.	o. r.
93426	M32 x 1,5	2 x 9,0	8,0	35	25	o. r.	o. r.	o. r.

Continuation ►

o. r. = on request

KVA-MFD-MS cable gland

with multiple sealing inserts

metric thread

Part no.	Size Metr.	Number holes x cable-Ø mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
93429	M40 x 1,5	6 x 6,0	8,0	43	10	o. r.	o. r.	o. r.
93427	M40 x 1,5	10 x 6,0	8,0	43	10	o. r.	o. r.	o. r.
93428	M40 x 1,5	4 x 6,5	8,0	43	10	o. r.	o. r.	o. r.
93430	M40 x 1,5	6 x 8,0	8,0	43	10	o. r.	o. r.	o. r.
93431	M40 x 1,5	4 x 9,0	8,0	43	10	o. r.	o. r.	o. r.
93432	M40 x 1,5	5 x 9,0	8,0	43	10	o. r.	o. r.	o. r.
93433	M40 x 1,5	5 x 10,0	8,0	43	10	o. r.	o. r.	o. r.
93434	M40 x 1,5	2 x 11,0	8,0	43	10	o. r.	o. r.	o. r.
93436	M50 x 1,5	15 x 5,0	10,0	54	10	o. r.	o. r.	o. r.
93435	M50 x 1,5	8 x 9,0	10,0	54	10	o. r.	o. r.	o. r.
93437	M50 x 1,5	3 x 10,0	10,0	54	10	o. r.	o. r.	o. r.
93438	M50 x 1,5	2 x 15,0	10,0	54	10	o. r.	o. r.	o. r.

PG thread

Part no.	Size PG	Number holes x cable-Ø mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
92094	9	2 x 1,0	6,0	17 / 20	100	o. r.	o. r.	o. r.
92039	9	2 x 3,0	6,0	17 / 20	100	o. r.	o. r.	o. r.
92041	9	4 x 3,0	6,0	17 / 20	100	o. r.	o. r.	o. r.
92042	9	2 x 4,0	6,0	17 / 20	100	o. r.	o. r.	o. r.
92043	9	1 x 5,0	6,0	17 / 20	100	o. r.	o. r.	o. r.
92044	11	6 x 2,0	6,0	20 / 22	50	o. r.	o. r.	o. r.
92045	11	2 x 2,3	6,0	20 / 22	50	o. r.	o. r.	o. r.
92046	11	6 x 2,5	6,0	20 / 22	50	o. r.	o. r.	o. r.
92047	11	2 x 3,0	6,0	20 / 22	50	o. r.	o. r.	o. r.
92048	11	3 x 3,0	6,0	20 / 22	50	o. r.	o. r.	o. r.
96881	11	2 x 5,0	6,0	20 / 22	50	o. r.	o. r.	o. r.
92052	13,5	3 x 2,0	6,5	24 / 30	50	o. r.	o. r.	o. r.
92053	13,5	10 x 2,0	6,5	24 / 30	50	o. r.	o. r.	o. r.
92054	13,5	2 x 3,0	6,5	24 / 30	50	o. r.	o. r.	o. r.
92055	13,5	3 x 3,0	6,5	24 / 30	50	o. r.	o. r.	o. r.
92095	13,5	6 x 3,5	6,5	24 / 30	50	o. r.	o. r.	o. r.
92096	13,5	2 x 5,0	6,5	24 / 30	50	o. r.	o. r.	o. r.
92057	13,5	2 x 6,0	6,5	24 / 30	50	o. r.	o. r.	o. r.
92058	16	7 x 2,0	6,5	24 / 30	50	o. r.	o. r.	o. r.
92097	16	2 x 4,0	6,5	24 / 30	50	o. r.	o. r.	o. r.
92060	16	4 x 4,0	6,5	24 / 30	50	o. r.	o. r.	o. r.
92061	16	6 x 4,0	6,5	24 / 30	50	o. r.	o. r.	o. r.
92062	16	2 x 6,0	6,5	24 / 30	50	o. r.	o. r.	o. r.
96434	16	3 x 7,0	6,5	24 / 30	50	o. r.	o. r.	o. r.
92064	21	21 x 2,0	7,0	30 / 40	25	o. r.	o. r.	o. r.
92065	21	8 x 3,0	7,0	30 / 40	25	o. r.	o. r.	o. r.
92066	21	6 x 4,0	7,0	30 / 40	25	o. r.	o. r.	o. r.
92067	21	8 x 4,0	7,0	30 / 40	25	o. r.	o. r.	o. r.
96956	21	4 x 5,0	7,0	30 / 40	50	o. r.	o. r.	o. r.
92069	21	4 x 6,0	7,0	30 / 40	25	o. r.	o. r.	o. r.
92068	21	6 x 6,5	7,0	30 / 40	25	o. r.	o. r.	o. r.
92070	21	3 x 7,0	7,0	30 / 40	25	o. r.	o. r.	o. r.
92072	21	4 x 8,0	7,0	30 / 40	25	o. r.	o. r.	o. r.
92098	21	2 x 9,0	7,0	30 / 40	25	o. r.	o. r.	o. r.
96430	29	6 x 6,0	8,0	40	25	o. r.	o. r.	o. r.
97327	29	10 x 6,0	8,0	40	25	o. r.	o. r.	o. r.
92099	29	4 x 6,5	8,0	40	10	o. r.	o. r.	o. r.
96710	29	6 x 8,0	8,0	40	10	o. r.	o. r.	o. r.
92074	29	4 x 9,0	8,0	40	10	o. r.	o. r.	o. r.
96564	29	5 x 9,0	8,0	40	10	o. r.	o. r.	o. r.
92075	29	5 x 10,0	8,0	40	10	o. r.	o. r.	o. r.
92076	29	2 x 11,0	8,0	40	10	o. r.	o. r.	o. r.
92077	36	15 x 5,0	8,5	50	10	o. r.	o. r.	o. r.
96336	36	8 x 9,0	8,5	50	25	o. r.	o. r.	o. r.
92079	36	3 x 10,0	8,5	50	10	o. r.	o. r.	o. r.
96397	36	2 x 15,0	8,5	50	25	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request